

The ideal system for disinfecting **all surfaces** in total security!

- **No chemical products**
- Tested under the **AFNOR NF T72-281** standard for airborne disinfection of surfaces
- **Eliminates at least 99.99% of micro-organisms, bacteria and viruses** (including SARS-COV-2 / Coronavirus)
- The best cost/efficiency ratio available for surface disinfection
- Adapted to all types of surfaces **without side-effects or deterioration**
- A surface disinfection concept offering **confidence and reassurance to your clients and personnel**



How UV acts

UV-C rays penetrate the heart of the DNA at 254 nanometres, the optimal wavelength for eradicating microorganisms (virus, bacteria, algae, yeast, mould...), disrupting the cell metabolism through to total destruction.

The advantages of BIO-SCAN®

- **A certified, tried and tested process**
- Treatment time of **a few seconds!**
- **Practical, ergonomic and easy to use** by anyone
- **No chemical products**, no risk to health or the environment
- Economical: low purchase price and fast return on investment


BIO-UV Group

850 avenue Louis Médard
34400 LUNEL - FRANCE
Tel. +33(0)4 99 133 911
contact@bio-scan.tech
www.bio-uv.com

BIO-SCAN

BIO-UV Group

Light

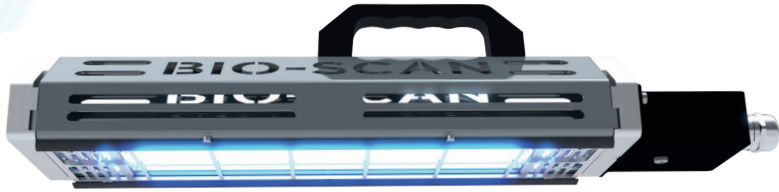

	Number of lamps	Electric power (W)	Dimensions W x L (mm)	Weight (kg)	Voltage (V)	Frequency (Hz)	Power consumption (W)
BIO-SCAN® Light 233	2	33	110 x 430	1	110-230	50/60	66
BIO-SCAN® Light 255	2	55	110 x 702	1.5	110-230	50/60	110
BIO-SCAN® Light 455	4	55	210 x 702	3	110-230	50/60	220

2 year guarantee

Technical characteristics

BIO-SCAN® Light range

- **Eliminates at least 99.99% of micro-organisms, bacteria and viruses** (including SARS-COV-2 / Coronavirus)
- Contact time: **a few seconds!**
- Convenient, ergonomic and easy to use by everyone
- A complete unit in a transport bag with shaped protective mousse, including: the BIO-SCAN® system, the electric unit with time counter, power supply cables, 1 protective mask, 1 pair of gloves (additional quantities available) and reactive stickers.
Cigar lighter socket optional.
- 4.5m power supply cable, socket to device (extension lead possible)
- Presence of a deflector to concentrate the maximum UV-C rays onto the surface to be treated
- On/off switch, adjustable handle
- Lamp lifespan: 1000 hours (lamps specially designed for surface treatment, a BIO-UV Group patent)
- **Designed and manufactured in France**



BIO-UV Group
850 avenue Louis Médard
34400 LUNEL - FRANCE
Tel. +33(0)4 99 133 911
contact@bio-scan.tech
www.bio-uv.com

