



The water treatment specialist

ultraviolet triogen® CF-TS

The **triogen® CF-TS** offers a high performance UV system for **commercial pools, spas and water features** with a range of options to meet operator budget, capabilities and needs. These systems provide advanced lamp and vessel efficiency with automatic and energy saving features for disinfection and improved water quality.

applications

- Commercial pools
- Hotel and club pool
- Water parks

benefits +

- Safely lower free chlorine residual with effective disinfection including chlorine resistant micro-organisms
- Chloramine destruction reducing "red eye" and irritation of skin and respiratory system
- Significant improvement in water clarity and air quality
- Helps to inhibit the growth of algae
- Savings in water, energy and chemical consumption
- Low capital and installation costs, with minimal service and plant room space required

main features



- Polychromatic 10,000 hour medium pressure UV lamp system
- Systems can be sized for UV dose and UVT combinations to suit customer requirements
- Advanced lamp efficiency and automatic low power setting
- Automatic "Smartdrive" wiper system and UV monitor
- Quick release powerhead for easy lamp replacement
- Wall mounted touchscreen microprocessor control panel
- NSF50 Cryptosporidium certified



UV technology

- Medium pressure polychromatic ultraviolet (UV) light is a highly effective means to inactivate bacteria and viruses, and will oxidise organic species in water.
- UV disinfection consists of a physical, chemical-free process, directly attacking the vital DNA of bacteria and micro organisms.
- Chlorine-resistant pathogens such as Cryptosporidium and Giardia are inactivated by UV light.
- UV reduces Chloramines by a variety of mechanisms.
- UV technology will easily enhance the disinfection and oxidation of all types of pools and water features.

technical data

Model	Flow Rates ⁽¹⁾		Flow Rates ⁽²⁾		Lamp Power	Supply Rating ^(*)	Inlet/outlet Connections ^(**)	Reactor dimensions	Control Panel dimensions
	m³/h	US gpm	m³/h	US gpm					
triogen® CF-TS 70	70	308	105	462	1 x 1.5	220-240 / PH+N/ 50-60	DN100 / 4"	740 x 668 x 397	600 x 320 x 650
triogen® CF-TS 145	145	638	217	955	1 x 2.5		DN150 / 6"	900 x 768 x 504	650 x 320 x 650
triogen® CF-TS 300	300	1320	450	1981	2 x 2.5	380-415 / 3 PH+N/ 50-60	DN200 / 8"	820 x 877 x 504	650 x 420 x 850
triogen® CF-TS 415	415	1827	622	2740	2 x 3.5		DN250 / 10"	890 x 977 x 609	650 x 420 x 850
triogen® CF-TS 620	620	2730	930	4095	3 x 3.5		DN300 / 12"	970 x 977 x 609	650 x 420 x 850
triogen® CF-TS 1000	1000	4402	1500	6604	5 x 3.5		DN400 / 16"	870 x 977 x 676	1050 x 320 x 1050

Product has met the requirements of NSF/ANSI 50, Annex H.1: Disinfection Efficacy for the ≥ 3 log reduction of *Cryptosporidium parvum*, *Enterococcus faecium* [ATCC #6569] and *Pseudomonas aeruginosa* [ATCC #27313]. This product is intended for supplemental disinfection and should be used with registered or approved disinfection chemicals to impart residual concentrations in accordance with state and local regulations.

⁽¹⁾ flow rates based on a dose of 60mJ/cm² at 95% UVT end of lamp life 10,000 hours based on max 3 on/off cycles per day

⁽²⁾ flow rates based on a dose of 40mJ/cm² at 95% UVT end of lamp life 10,000 hours based on max 3 on/off cycles per day

* Electrical supply must be confirmed at time of order

** BS EN1092 PN10 and ANSI 150 flanges, except CT-TS 620, 1000 : ANSI 150 only.

quality standard

- NSF50 *Cryptosporidium* certified

materials


- Reactor Vessel: Electropolished 316L stainless steel, rated to 10 Bar(g)
- Flanges: COMBI or ANSI 150
- Lamp: high purity quartz
- Lamp(s) covers safety
- Thimble: high purity quartz
- Panel: Painted steel, IP54 protection

options

- 316L stainless steel ancillaries
- Systems can be sized for other UV dose and UVT combinations upon request

controls and outputs

- BMS, Modbus and Ethernet
- Local and remote:
 - Lamp on / off / low power control
 - Lamp on / off indication
 - Fault alarms
 - Lamp hours
 - Lamp change required
 - UV intensity
- Local:
 - UV intensity in W/m², mJ/cm² or % requires a 4-20 mA signal from a water flowrate for mJ/cm² display
 - Languages options (English, French, Spanish, German)
 - Reactor temperature (°C or °F)
 - Panel temperature (°C or °F)
 - Real time clock with date
 - Data logging trends (lamp current, temperature, UV Intensity)
- Contacts outputs :
 - ON/OFF
 - General
 - Alarm, Alarm 1, Alarm 2
 - Warning

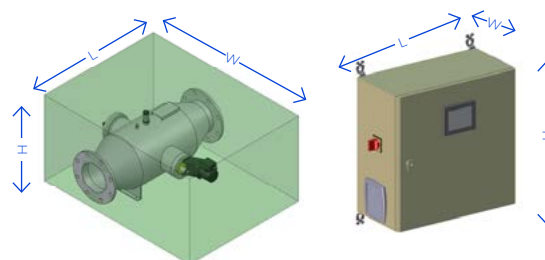

contact

triogen® by BIO-UV Group
 export@bio-uv.com
 www.bio-uv.com